


FT-IDS Heat Shrinkable Identification Sleeve

Features:

- Shrink ratio : 2:1 or 3:1
- Working temperature : -55°C~+125°C
- Flame retardant, halogen free, low smoke emission
- Computer printable, permanent identification
- Meets NF F 16101, DIN5510 and ASTM D 2671 part B
- RoHS, Halogen free

Application:

This tubing can be custom printed with words and symbols on both sides by thermal transfer equipment and all markings are permanent after printing. It is used to identify and mark wire, cable, tools, hoses and equipment in subway, public transportation, aerospace and shipbuilding industries.

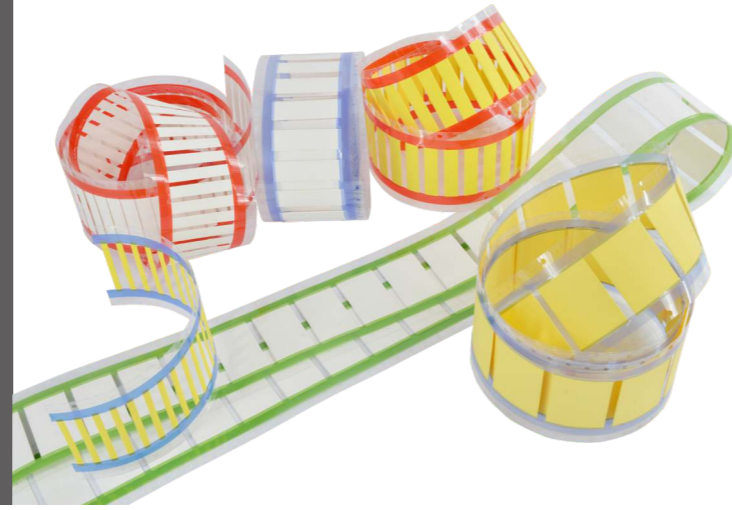

1. Dimensions

As Supplied (Min.)		After Recovery	Flat Width	Double W.T. before recovery	Length	Packing pcs/coil
Inch	mm	I.D. Max.(mm)	(mm)	(mm)		
3/32	2.79±0.20	≤1.18	5.0±0.3	0.48±0.10	13mm 19mm 25mm 38mm 50mm	2500
1/8	3.64±0.23	≤1.59	6.3±0.4	0.48±0.10		2000
1/5	5.26±0.25	≤2.36	8.9±0.4	0.49±0.10		2000
1/4	6.92±0.28	≤3.18	11.5±0.4	0.50±0.10		1500
3/8	10.2±0.32	≤4.75	16.7±0.5	0.51±0.11		1000
1/2	13.5±0.36	≤6.35	21.8±0.6	0.52±0.11		500
3/4	20.1±0.40	≤9.53	32.2±0.6	0.53±0.11		500
1	26.7±0.45	≤12.7	42.5±0.7	0.55±0.12		500
1 1/2	39.8±0.51	≤19.1	63.2±0.8	0.57±0.12		250
2	53.0±0.56	≤25.4	83.9±0.9	0.58±0.13		250

Remark:

1. Standard color: Yellow, White, other colors upon request.
2. Tear-off seam can be customized upon request.